




EXTENDED POINT LIVE CENTERS

- HIGH PRECISION TRIPLE BEARING DESIGN
- SEALED TO PROTECT BEARINGS FROM CONTAMINATION



8818



- Superior tool clearance for flexible machining
- Engineered for quality, priced for value

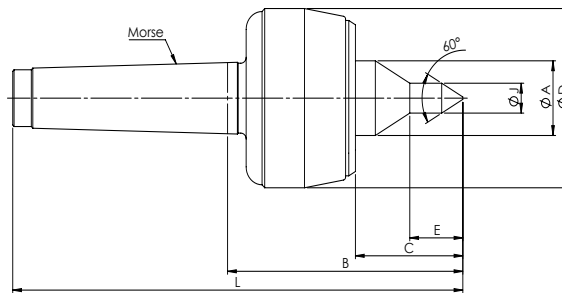

K MT	Max. weight [lbs]	RPM	Max. concentr. error [in]	Code No.	J [in]	A [in]	D [in]	E [in]	C [in]	B [in]	L [in]
2	198	5,000	0.0004	7-564-002	0.31	0.71	1.57	0.63	1.16	2.54	5.06
3	330	4,000	0.0004	7-564-003	0.39	0.98	2.20	0.78	1.59	3.46	6.65
4	440	3,000	0.0004	7-564-004	0.47	1.26	2.52	1.10	2.02	4.03	8.07
5	551	2,000	0.0004	7-564-005	0.55	1.57	3.34	1.37	2.60	5.10	10.2

8818 R

- Superior tool clearance for flexible machining
- Low runout at high RPMs
- High precision triple bearing design

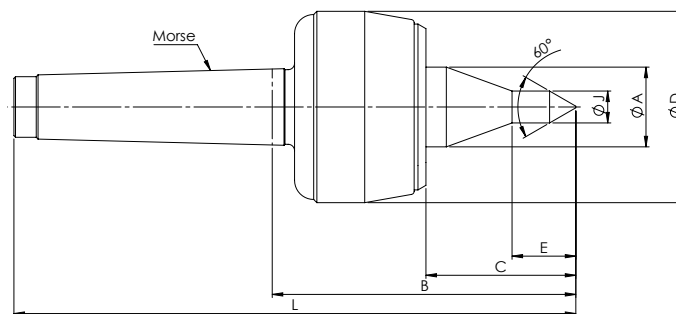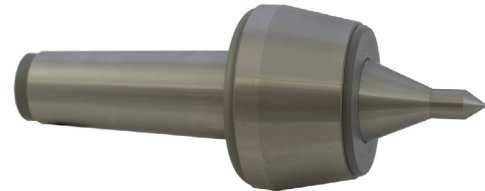

K MT	Max. weight [lbs]	RPM	Max. concentr. error [in]	Code No.	J [in]	A [in]	D [in]	E [in]	C [in]	B [in]	L [in]
2	198	7,000	0.0002	7-569-002	0.31	0.78	1.77	0.63	1.34	2.95	5.47
3	330	5,000	0.0002	7-569-003	0.39	0.98	2.36	0.78	1.85	3.76	6.95
4	440	3,800	0.0002	7-569-004	0.47	1.26	2.76	1.02	2.08	4.50	8.54
5	551	3,000	0.0004	7-569-005	0.55	1.57	3.54	1.18	2.56	5.65	10.75