


- HIGH PRECISION TRIPLE BEARING DESIGN
- SEALED TO PROTECT BEARINGS FROM CONTAMINATION



8823L

- Adjustable ultra precision radial bearing significantly reduces runout
- Superior tool clearance for flexible machining
- High load capacity



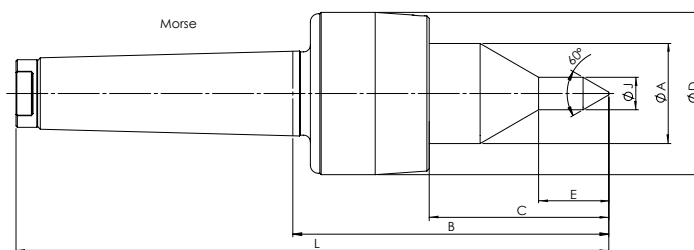


K MT	Max. weight [lbs]	RPM	Max. concentr. error [in]	Code No.	J [in]	A [in]	D [in]	E [in]	C [in]	B [in]	L [in]
2	661	8,000	0.0006	7-567-002L	0.31	0.94	1.73	0.63	1.51	3.34	5.88
3	771	6,000	0.0006	7-567-003L	0.39	1.10	1.89	0.78	1.91	3.93	7.12
4	2,425	4,500	0.0006	7-567-004L	0.47	1.45	2.36	1.02	2.62	4.60	8.64
5	3,306	4,000	0.0006	7-567-005L	0.55	1.97	2.95	1.18	3.40	5.81	10.9



8814 R

- Extended revolving centers with 60° point

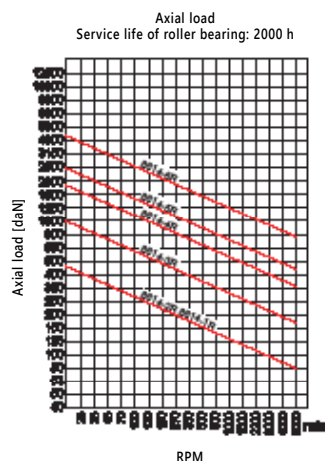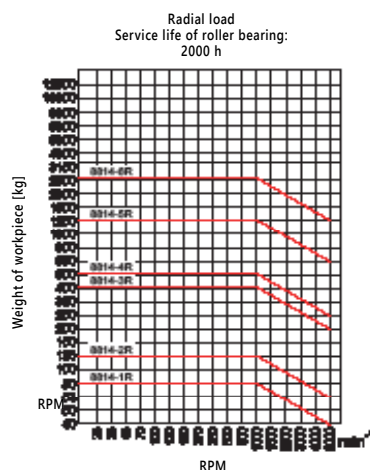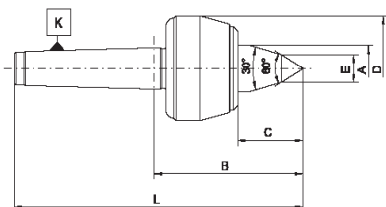

K MT	Max. weight [lbs]	RPM	Max. concentr. error [in]	Code No.	A [in]	B [in]	C [in]	D [in]	E [in]	L [in]
1	176	7,000	0.0004	7-560-001	0.59	2.62	0.91	1.42	0.35	4.72
2	308	7,000	0.0002	7-560-002	0.79	2.93	1.32	1.77	0.39	5.45
3	880	5,000	0.0002	7-560-003	0.98	3.62	1.71	2.36	0.47	6.81
4	1,100	3,800	0.0002	7-560-004	1.26	4.47	2.05	2.76	0.55	8.50
5	2,640	3,000	0.0002	7-560-005	1.57	5.68	2.57	3.54	0.63	10.74
6	5,500	2,600	0.0004	7-560-006	1.97	6.71	3.05	4.13	0.71	13.88