


Code No.	Type	K 7:24	Arbor diameter d [in]	Length A [in]	Running Bushing diameter D1 [in]	Running Bushing Length a [in]	Number of bushings	Weight [lbs]
7-010-005	30-7/8 A10-2	NMTB 30	0.875	10	1.625	2.625	1	6.15
7-010-010	31 A10-2	NMTB 30	1.000	10	1.625	2.625	1	6.83
7-010-015	31-1/4 A10-2	NMTB 30	1.250	10	1.625	2.625	1	8.37
7-010-017	31-1/4 A10-3	NMTB 30	1.250	10	1.875	3.125	1	9.14
7-010-027	41 A8	NMTB 40	1.000	8	-	-	-	6.43
7-010-028	41 A10	NMTB 40	1.000	10	-	-	-	7.42
7-010-030	41 A12	NMTB 40	1.000	12	-	-	-	8.42
7-010-035	41 A16-3	NMTB 40	1.000	16	1.875	3.125	1	11.00
7-010-037	41-1/4 A8	NMTB 40	1.250	8	-	-	-	8.53
7-010-038	41-1/4 A10	NMTB 40	1.250	10	-	-	-	10.55
7-010-040	41-1/4 A12	NMTB 40	1.250	12	-	-	-	11.86
7-010-045	41-1/4 A16-3	NMTB 40	1.250	16	1.875	3.125	1	14.77
7-010-055	50-7/8 A18-4	NMTB 50	0.875	18	2.125	3.750	1	16.00
7-010-057	51 A8	NMTB 50	1.000	8	-	-	-	9.43
7-010-060	51 A12	NMTB 50	1.000	12	-	-	-	11.37
7-010-065	51 A18-4	NMTB 50	1.000	18	2.125	3.750	1	17.28
7-010-070	51-1/4 A12	NMTB 50	1.250	12	-	-	-	14.57
7-010-075	51-1/4 A18-4	NMTB 50	1.250	18	2.125	3.750	1	20.32



**7170 A**

- Long milling machine arbors
- Equipped with assorted width of solid spacers
- Equipped with running bushings and threaded arbor nut
- Provided with 23/32 x 1-3/4 end pilots

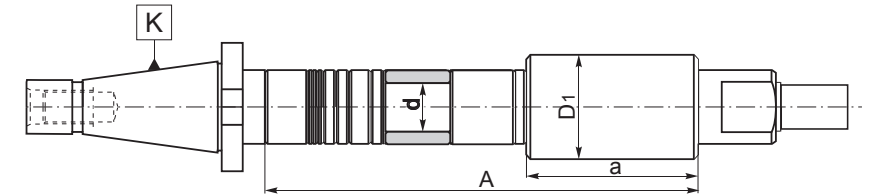

Code No.	Type	K 7:24	Arbor diameter d [in]	Length A [in]	Running Bushing diameter D1 [in]	Running Bushing Length a [in]	Number of bushings	Weight [lbs]
7-015-002	31 B2	NMTB 30	1.000	2	-	-	-	2.30
7-015-005	40-7/8 B14-3	NMTB 40	0.875	14	1.875	3.125	1	9.10
7-015-006	40-7/8 B16-3	NMTB 40	0.875	16	1.875	3.125	1	9.40
7-015-008	41 B3	NMTB 40	1.000	3	-	-	-	3.70
7-015-010	41 B14-3	NMTB 40	1.000	14	1.875	3.125	1	11.50
7-015-015	41 B20-3	NMTB 40	1.000	20	1.875	3.125	1	13.80
7-015-017	41-1/4 B3	NMTB 40	1.250	3	-	-	-	5.00
7-015-020	41-1/4 B14-3	NMTB 40	1.250	14	1.875	3.125	1	13.40
7-015-025	41-1/4 B20-3	NMTB 40	1.250	20	1.875	3.125	1	16.60
7-015-030	41-1/2 B20-4	NMTB 40	1.500	20	2.125	3.750	1	23.20
7-015-033	51 B3.1/2	NMTB 50	1.000	3.5	-	-	-	6.80
7-015-035	51 B15-4	NMTB 50	1.000	15	2.125	3.750	1	15.10
7-015-040	51 B18-4	NMTB 50	1.000	18	2.125	3.750	2	18.40
7-015-045	51 B24-4	NMTB 50	1.000	24	2.125	3.750	2	21.00
7-015-047	51-1/4 B3-1/2	NMTB 50	1.250	3.5	-	-	-	8.80
7-015-050	51-1/4 B15-4	NMTB 50	1.250	15	2.125	3.750	1	17.50
7-015-055	51-1/4 B18-4	NMTB 50	1.250	18	2.125	3.750	2	20.70
7-015-060	51-1/4 B24-4	NMTB 50	1.250	24	2.125	3.750	2	24.20
7-015-065	51-1/4 B30-4	NMTB 50	1.250	30	2.125	3.750	2	30.00
7-015-067	51-1/2 B3-1/2	NMTB 50	1.500	3.5	-	-	-	9.00
7-015-070	51-1/2 B18-4	NMTB 50	1.500	18	2.125	3.750	2	25.00
7-015-075	51-1/2 B24-5	NMTB 50	1.500	24	2.750	4.250	2	36.00
7-015-080	51-1/2 B30-5	NMTB 50	1.500	30	2.750	4.250	2	44.60
7-015-090	52 B24-5	NMTB 50	2.000	24	2.750	4.250	2	48.00
7-015-095	52 B30-5	NMTB 50	2.000	30	2.750	4.250	2	62.30
7-015-100	52 B36-5	NMTB 50	2.000	36	2.750	4.250	2	73.00
7-015-105	52-1/2 B36-6	NMTB 50	2.500	36	3.375	4.250	2	94.30



**7170 B**

- Long milling machine arbors
- Equipped with assorted width of solid spacers
- Equipped with running bushings and threaded arbor nut

